


Professional equipment for preparing cold creams, sorbets, and granitas. Also available in the ETC version (Electronic Temperature Control).



Certifications

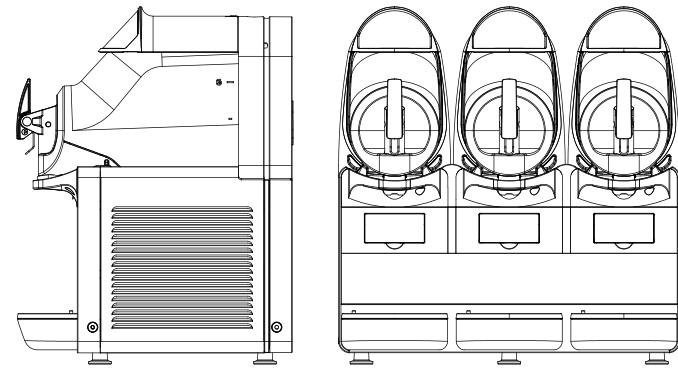

Available Voltages

230V 50Hz / 240V 50Hz / 115V 60Hz / 208-220V 60Hz / 100V 50-60Hz

Technical Specifications	NG easy 6/1	NG easy 6/2	NG easy 6/3
Capacity (L)	6	12	18
Height (cm)	62	62	62
Width (cm)	20	40	60
Depth (cm)	48	48	48
Net weight, approx. (Kg)	26	42 / 38 *	57
Gross weight, approx. (Kg)	28	45 / 41 *	61
Power ** (W)	460	640	950
Gas	R290	R290	R290
Gas (220V 60Hz, 100 / 115V 50 / 60Hz)	R134a	R448a	R448a

Additional Technical Features	Safety and control devices
Shatterproof, non-toxic polycarbonate container	Noise level below 70 dB (A)
Painted steel and ABS body	R290 gas models: equipped with ATEX electrical components
Tilted container for easy emptying	Hermetic compressor with protector
POM plastic stirrer	Mechanical product density control
Air-cooled condenser	Accessible mechanical temperature control (115V only)
Fixed-speed gear reducer	Pre-equipped for tap lock
Patented magnetic transmission	Accessible and cleanable condenser air filter
Lid unlocking button	Day/night function (production/maintenance mode)
Tilted container for easy emptying	Internal electronic temperature control (230V only)

Optional Accessories	
Shatterproof Tritan tank - BPA free	Water-cooled condenser system (ETC version)
Re-COVER: for energy savings and reduced condensation	Display (ETC version)
Container/lid unlocking with key	Product temperature display (ETC version)
Timer for day/night function	LED WALL: illuminated front display (LED technology)
Illuminated cover	Control panel (ETC version)

* With R290 Gas

We reserve the right to make changes without prior notice.

** Test conditions: 32°C - 230V 50Hz - 1st hour of operation